

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 014 520 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
29.09.2004 Bulletin 2004/40

(51) Int Cl.7: **H01S 5/323**

(21) Application number: **99125513.4**

(22) Date of filing: **21.12.1999**

(54) **Nitride semiconductor laser and method of fabricating the same**

Nitrid-Halbleiterlaser und dessen Herstellungsverfahren

Laser semiconducteur à base de niture et son procédé de fabrication

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **22.12.1998 JP 36416198**  
**25.06.1999 JP 18034499**

(43) Date of publication of application:  
**28.06.2000 Bulletin 2000/26**

(73) Proprietor: **Pioneer Corporation**  
**Meguro-ku, Tokyo (JP)**

(72) Inventors:  
• **Ota, Hiroyuki c/o Corpor. Res. and Dev.**  
**Tsurugashima-shi, Saltama 350-2288 (JP)**  
• **Chikuma, Kiyofumi c/o Corpor. Res. and Dev.**  
**Tsurugashima-shi, Saltama 350-2288 (JP)**

(74) Representative:  
**Klingselsen, Franz, Dipl.-Ing. et al**  
**Patentanwälte,**  
**Dr. F. Zumstein,**  
**Dipl.-Ing. F. Klingselsen,**  
**Postfach 10 15 61**  
**80089 München (DE)**

(56) References cited:  
**EP-A- 0 688 070**

**WO-A-98/34304**

- **KIMURA Y ET AL: "Room-temperature pulsed operation of GaN-based laser diodes on a-face sapphire substrate grown by low-pressure metalorganic chemical vapor deposition" JAPANESE JOURNAL OF APPLIED PHYSICS, PART 2 (LETTERS), 15 OCT. 1998, PUBLICATION OFFICE, JAPANESE JOURNAL APPL. PHYS, JAPAN, vol. 37, no. 10B, pages L1231-L1233, XP002135807 ISSN: 0021-4922**
- **ABARE A C ET AL: "CLEAVED AND ETCHED FACET NITRIDE LASER DIODES" IEEE JOURNAL OF SELECTED TOPICS IN QUANTUM ELECTRONICS, US, IEEE SERVICE CENTER, vol. 4, no. 3, 1 May 1998 (1998-05-01), pages 505-509, XP000782260 ISSN: 1077-260X**

**EP 1 014 520 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### 1. Field of the Invention

[0001] The present invention relates to a group III nitride semiconductor device (hereafter also referred to as a device simply) and, particularly to a fabrication method of a semiconductor laser device using the same material system.

### 2. Description of the Related Art

[0002] A semiconductor laser device has a resonator consisting of a pair of flat parallel planes or reflectors between which a multilayer semiconductor laser structure is formed. To operate the laser device, a pair of the mirror facets defining an optical cavity is necessary. For example, in case of a GaAs semiconductor laser device, since an epitaxially grown GaAs crystal used for the device and a GaAs wafer for the substrate thereof have a cleavage nature, this nature is utilized for the fabrication of the device. The resonator is formed in such a manner that straight lines of grooves are carved to the GaAs wafer at a predetermined interval of cavity length and thus, the wafer is cleaved along the grooves into bars by application of stress. Therefore, the cleavage of wafer facilitates to form automatically flat mirror planes parallel to each other in a process for forming the laser structure.

[0003] Thus, in the fabrication of a semiconductor laser device of Fabry-Perot type using a conventional semiconductor crystal such as GaAs, the mirror facets of the device have been formed by using the same cleavage properties of GaAs crystal substrate and GaAs multilayers.

[0004] On the other hand, in the case of group III nitride semiconductor device, it is inevitable to perform the epitaxial-growth of nitride crystal film on a substrate made of sapphire or SiC, because a nitride bulk crystal to be used in practice has not been manufactured yet.

[0005] SiC is not frequently used as a substrate for the nitride device, because the SiC substrate is expensive and a nitride film deposited on the SiC substrate easily cracks due to the difference in the thermal expansion coefficient therebetween, thus sapphire is commonly used as a substrate. In the case of epitaxial growth of nitride on a sapphire substrate, a high quality single-crystal film is obtained on a C-face i.e., (0001) plane of sapphire, or an A-face, i.e., (11 $\bar{2}$ 0) plane (hereafter referred to as (11-20) plane) of sapphire.

[0006] The mirror facets may be formed by an etching process such as reactive ion etching (RIE) instead of the method using the cleavage, because it is hard to crack the sapphire substrate in comparison with the GaAs substrate having been used so far for semiconductor laser devices.

[0007] Reactive ion etching is mainly used as a method for obtaining the mirror facets of the nitride semiconductor laser on the sapphire substrate at present.

[0008] However, the resultant device with the mirror facet formed by the reactive ion etching has a disadvantage that the far-field pattern of its emitted light exhibits multiple spots. This multiple-spot phenomenon of the laser device is caused by the fact that the sapphire substrate cannot be effectively etched even by dry etching such as the reactive ion etching.

[0009] Fig. 1 shows a cross section of a laser device 1 fabricated on a sapphire substrate 3 with a mirror facet 2 formed by an etching process. A remaining portion of the sapphire substrate 3 without being etched as shown by (A) in Fig. 1 reflects a part of emitted light beam, and then the reflected light interferes with the main light beam, so that a far field changes to multiple spots. Since the alteration of the far-field pattern into multiple spots is fatal as a light source for reading an optical disk, making the device impractical.

[0010] A GaN laser have been initially fabricated by using an etched mirror obtained by the reactive ion etching. The mass-production-type GaN laser with the cleaved mirror is studied in view of the change of a far field pattern to multiple spots. It is a matter of course that a cleavage cannot be preferably formed on sapphire in mass production. Therefore, the following method have been used. First, after forming a GaN film with a thickness of approximately 2  $\mu$ m on a sapphire substrate by metalorganic chemical vapor deposition (MOCVD), the substrate with the film is temporarily taken out of a reactor. A SiO<sub>2</sub> film is formed on the GaN film and stripe-like windows are opened on the film. After putting the film in the MOCVD system again, a GaN film is grown up to a thickness of approximately 10  $\mu$ m to obtain a flat film. After that, the obtained wafer is subject to the hydride vapor phase epitaxial processes (HVPE) to form a GaN film on the wafer up to a thickness of approximately 200  $\mu$ m. Next, the backside of the sapphire substrate of the obtained wafer is lapped to remove almost of the sapphire portion, and then the GaN substrate having a thickness of approximately 80  $\mu$ m is obtained. The resultant substrate is set in the MOCVD system to perform epitaxial growth of a laser structure. Because the obtained wafer is very similar to a wafer of a conventional GaAs-based laser, it is possible to apply various treatments and thereafter cleaving the crystal substrate. In this way, a laser device is fabricated.

[0011] However, the conventional method as described above requires many steps, and is complicated. As a result, the method invites a very low yield of the group III nitride semiconductor devices. Such a method is not suitable for mass production.

### OBJECT AND SUMMARY OF THE INVENTION

[0012] Therefore, an object of the present invention is to provide a group III nitride-semiconductor laser fabrication method from which high-quality mirror facets for a laser structure can be obtained with high reproducibility.

[0013] A nitride semiconductor laser device according to the present invention as defined in claim 1 having successively grown crystal layers each made of a group III nitride semiconductor  $(\text{Al}_x\text{Ga}_{1-x})_{1-y}\text{In}_y\text{N}$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) comprises:

a cleavable or parting substrate;  
a crystal layer made of the group III nitride semiconductor formed directly on the substrate;  
a mirror facet for optical resonance consisting of a cleavage plane of said crystal layers made of the group III nitride semiconductor; and  
a decomposed-matter area of the nitride semiconductor interposed at the interface between said substrate and said crystal layer, in which decomposed-matter area the crystal bond between said substrate and said crystal layer is broken, said decomposed-matter area being disposed at an intersecting portion with the cleavage plane.

[0014] In an embodiment of the nitride semiconductor laser device according to the invention, the decomposed-matter area of the nitride semiconductor is formed by a light beam applied to the interface from the substrate side.

[0015] In another embodiment of the nitride semiconductor laser device according to the invention, the device further comprises a waveguide extending along a direction normal to the cleavage plane of the nitride semiconductor.

[0016] In a further embodiment of the nitride semiconductor laser device according to the invention, the waveguide has a ridge shape.

[0017] In a still further embodiment of the nitride semiconductor laser device according to the invention, the substrate is made of sapphire.

[0018] A fabrication method according to the present invention as defined in claim 6 is a method for producing a nitride semiconductor laser device having crystal layers each made of a group III nitride semiconductor  $(\text{Al}_x\text{Ga}_{1-x})_{1-y}\text{In}_y\text{N}$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) and layered on a cleavable or parting substrate in order, the method comprising the steps of:

forming a plurality of crystal layers each made of a group III nitride semiconductor  $(\text{Al}_x\text{Ga}_{1-x})_{1-y}\text{In}_y\text{N}$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) on a cleavable or parting substrate;  
applying a light beam from the substrate side toward the interface between the substrate and the first of said plurality of crystal layers formed on said substrate thereby forming the decomposed-matter area of a nitride semiconductor in which the crystal bond between said substrate and said first crystal layer is broken; and  
cleaving the substrate along a straight line intersecting the decomposed-matter area, thereby forming a cleavage plane of said plurality of crystal lay-

ers.

[0019] In an embodiment of the fabrication method according to the invention, the wavelength of the light beam is selected from wavelengths passing through the substrate and absorbed by the crystal layer in the vicinity of the interface.

[0020] In another embodiment of the fabrication method according to the invention, the method further comprises a step of forming a waveguide extending along a direction normal to the cleavage plane of the nitride semiconductor.

[0021] In a further embodiment of the fabrication method according to the invention, the crystal layers of the nitride semiconductor are formed by metal-organic chemical vapor deposition.

[0022] In a still further embodiment of the fabrication method according to the invention, the method further comprising a step of applying a light beam focused on an outer surface of the substrate to form a groove serving as a starting point of the aforementioned straight line in the step of forming the mirror facet for optical resonance.

[0023] According to the present invention, it is possible to obtain high-quality mirror facets with a high reproducibility by locally untying the crystal bond between the sapphire substrate and GaN crystal nearby the mirror facets of a laser device and thereby, cutting the GaN crystal nearby the laser facet cleave along its normal cleavage plane.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0024]

Fig. 1 is a schematic sectional view of a group III nitride-semiconductor laser device;

Fig. 2 is a schematic perspective view showing the lattice plane of a GaN crystal layer formed on a sapphire substrate;

Fig. 3 is a schematic perspective view showing the fracture plane of a GaN crystal layer formed on a sapphire substrate;

Fig. 4 is a schematic elevation view showing a GaN semiconductor laser device of an embodiment of the present invention, which is seen from the mirror facet for optical resonance;

Figs. 5 to 7 are schematic sectional views each showing a portion of a wafer of the semiconductor laser device at each fabricating step of an embodiment of the present invention;

Fig. 8 is a schematic top view of a laser wafer in the semiconductor-laser fabricating step of another embodiment of the present invention;

Figs. 9 and 10 are schematic sectional views each showing a laser wafer in the semiconductor-laser fabricating step of an embodiment of the present invention;

Figs. 11 and 12 are schematic top views each showing a laser substrate in the semiconductor-laser fabricating step of another embodiment of the present invention;

Fig. 13 a schematic perspective view showing the fracture plane of a GaN crystal layer formed on an A-face sapphire substrate; and

Fig. 14 is a schematic perspective view showing the fracture plane of a GaN crystal layer formed on a C-face sapphire substrate.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] Embodiments of group III nitride semiconductor laser devices according to the present invention are described below by referring to the accompanying drawings.

[0026] Although sapphire does not have a clear cleavage plane like a Si or GaAs wafer, a C-face sapphire easily crack along its  $(1\bar{1}00)$  plane (hereafter referred to as (1-100) plane), and also an A-face sapphire can be parted along its  $(1\bar{1}02)$  plane (hereafter referred to as (1-102) plane), so called R-plane, considerably close to the cleavage of ordinary crystal. The following methods are used to form the cavity mirrors of nitride semiconductor lasers on a sapphire substrate: First, a method of growing nitride semiconductor layers on a C-face sapphire substrate and then cracking along (1-100) plane of the sapphire substrate. Second, a method of growing nitride semiconductor layers on an A-face sapphire substrate and then cracking along (1-102) plane of the sapphire substrate.

[0027] As for the first method of mirror facet formation applied to the device grown on a C-face sapphire substrate, there are problems that a sapphire substrate cannot be cracked unless the substrate is made thin enough by lapping down the backside of the substrate or that it does not cleave with a high reproducibility. These problems are caused by the fact that (1-100) plane of sapphire is not a cleavage plane. Since sapphire is very hard crystal, it cannot be cracked along a marking line unless it is made thin enough, and it is necessary to reduce the thickness of a sapphire substrate down to approximately  $100\text{ }\mu\text{m}$  in order to obtain a cleavage plane practical for a laser device. When lapping the backside of a wafer on which a device structure is already formed, the wafer is warped or distorted due to the difference between thermal expansion coefficients of sapphire and nitrides or due to the residual stress caused by lapping process. Thereby, when the back of a device wafer is lapped, the wafer is apt to fracture in the process. This is very disadvantageous for mass production.

[0028] Moreover, the crystallographic orientation of nitride grown on the C-face of sapphire tilts by an angle of  $30^\circ$  from the sapphire substrate orientation (the nitride is hereafter referred to as GaN because a typical binary compound is GaN). When parting the sapphire

substrate on (1-100) plane thereof, GaN crystal on the sapphire substrate is to crack on (11-20) plane. The cleavage plane of GaN crystal is (1-100) plane. However, it is also possible to tentatively cleave the GaN crystal on (11-20) plane due to the GaN crystal's symmetry. When the crystal accurately cracks along (11-20) plane, a very preferable fracture plane can be obtained.

[0029] On the other hand, because (1-100) plane of sapphire is not a cleavage plane, it is possible to crack the sapphire even if a scribing line is drawn at a slightly deviated angle. Because GaN is cracked in a direction slightly deviated from (11-20) plane, the fracture facet consists of many (1-100) planes of GaN, each of which is the cleavage plane, forming a stepwise appearance. The stepwise facet causes degradation of the reflectivity of mirrors and perturbation of the wave front of emitted light. Thereby, the quality of a mirror facet for optical resonance of a laser device is deteriorated.

[0030] Whereas, the second method of mirror facet forming method applied to the device formed on the A-face sapphire substrate has a problem that the quality of the fracture plane of GaN is not sufficient.

[0031] Because the sapphire substrate can be easily cracked along its cleavage plane (1-102), so called R-plane, it is possible to cleave the sapphire having a thickness of  $250$  to  $350\text{ }\mu\text{m}$  normally used as a substrate. However, (1-100) plane of GaN grown on the A-face of sapphire and the R-plane of the sapphire are deviated from each other by an angle of  $2.4^\circ$ . Fig. 2 depicts that situation. In Fig. 2, the angle  $2.4^\circ$  is exaggeratedly shown and the same is true for the subsequent drawings. Therefore, the striations shown in Fig. 3 appear on the fracture plane of GaN. This is because (1-100) plane of GaN appears in a stepwise manner similar to the case on a C-face sapphire. It seems that the crystal bond between a sapphire substrate and GaN crystal is stable. Sapphire is stably parted with the R-plane, the fracture plane of GaN shown in Fig. 3 is reproducibly obtained. Therefore, in the case of the A-face sapphire substrate, the quality of fracture plane is not very good though it is reproducible.

[0032] In view of the experiment mentioned above, the present inventors have completed that present invention based on the result of studies of various method of producing a semiconductor laser device comprising group III nitride layers layered on the sapphire substrate to acquire a resonator of a high quality thereof. It should be noted that the embodiment described below simply illustrates the invention, and the invention is not limited thereto.

[0033] Fig. 4 shows the group III nitride semiconductor laser of an embodiment. The semiconductor laser device is constituted of a GaN (or AlN) layer 102 formed at a low temperature, n-type GaN layer 103, n-type  $\text{Al}_{0.1}\text{Ga}_{0.9}\text{N}$  layer 104, n-type GaN layer 105, active layer 106 mainly containing InGaIn, p-type  $\text{Al}_{0.2}\text{Ga}_{0.8}\text{N}$  layer 107, p-type GaN layer 108, p-type  $\text{Al}_{0.1}\text{Ga}_{0.9}\text{N}$  layer 109, and p-type GaN layer 110 which are stacked on the



single-crystal sapphire substrate 101 in order. An n-side electrode 114 and p-side electrodes 113 and 115 are connected to the n-type GaN layer 103 and p-type GaN layer 110. A ridge stripe portion 118 is formed on the p-type  $\text{Al}_{0.1}\text{Ga}_{0.9}\text{N}$  layer 109. The device is covered with and protected by an insulating film 111 made of  $\text{SiO}_2$  except electrodes.

[0034] The group III nitride semiconductor laser of the embodiment has a decomposed-matter area 150 of a nitride semiconductor disposed at the interface between the sapphire substrate 101 and its crystal layer 103 and having a cleavage plane for resonance i.e., (1-100) plane intersecting the superimposed crystal layers 102 to 110. The decomposed-matter area 150 of the nitride semiconductor is formed by a light beam applied to the interface from the substrate side. In the decomposed-matter area 150 of nitride semiconductor formed by laser-beam irradiation, the crystal bond between a sapphire substrate and GaN crystal is locally broken. Therefore, a layered portion of GaN nearby a reflector over the decomposed-matter area 150 ideally cracks along the crystallographic cleavage plane of GaN without influence of the fracture of sapphire substrate in the mirror facet forming step. The wavelength of applied laser beam is selected from wavelengths absorbed by a GaN crystal layer and passing through the sapphire substrate. Absorbed light in the GaN crystal layer near the interface is almost converted into heat where many crystal defects are present. The temperature of the laser-beam applied area of a crystal layer nearby the sapphire substrate rapidly rises and GaN is decomposed into gallium and nitrogen.

[0035] This semiconductor laser device emits light by recombining electrons with holes in the active layer 106. The n-type GaN layer 105 and p-type GaN layer 108 serve as guide layers. Light generated in the active layer 106 is guided in the guide layers 105 and 108. Electrons and holes are effectively confined in the active layer 106 by setting band gaps of the guide layers 105 and 108 to values larger than that of the active layer 106. The p-type  $\text{Al}_{0.2}\text{Ga}_{0.8}\text{N}$  layer 107 serves as a barrier layer for further enhancing the confinement of carriers (particularly, electrons), the n-type  $\text{Al}_{0.1}\text{Ga}_{0.9}\text{N}$  layer 104 and the p-type  $\text{Al}_{0.1}\text{Ga}_{0.9}\text{N}$  layer 109 serve as cladding layers respectively each formed to have refractive indexes lower than those of the guide layers 105 and 108. The wave guidance in the film-thickness direction is performed due to the difference between refractive indexes of the cladding layer and the guide layer. The ridge stripe portion 118 is formed in order to produce a lateral-directional step in an effective refractive index by changing the thickness of the cladding layer 109, thereby confining generated light in the lateral direction.

[0036] The n-type GaN layer 103 is a ground layer formed as a current path because sapphire serving as a substrate does not have any electric conductivity at all. Moreover, the GaN (or AlN) layer 102 formed as a low temperature growth layer is a so-called buffer layer

that is formed to give a smoothing film on the sapphire substrate that is a different material for GaN.

[0037] The device structure shown in Fig. 4 is fabricated in the following fabricating steps in which layered structure for a laser device is formed on an A-face sapphire substrate whose both sides are mirror-finished through the metal-organic chemical vapor deposition (MOCVD).

[0038] First, the sapphire substrate 101 is set into an MOCVD reactor and held for 10 minutes in a hydrogen-gas flow at a pressure of 300 Torr and a temperature of 1050 °C to thermally clean the surface of the sapphire substrate 101. Thereafter, the temperature of the sapphire substrate 101 is lowered to 600 °C, and ammonia ( $\text{NH}_3$ ) which is a nitrogen material and TMA (trimethyl aluminium) which is an Al material are introduced into the reactor to deposit a buffer layer 102 made of AlN up to a thickness of 20 nm.

[0039] Then, supply of TMA is stopped, the temperature of the sapphire substrate 101 on which the buffer layer 102 is formed is raised to 1050 °C again while flowing only  $\text{NH}_3$ , and trimethyl gallium is introduced to form the n-type GaN ground layer 103 on the buffer layer 102. In this case, Me-SiH<sub>3</sub> (methyl silane) is added into a growth atmosphere gas as the precursor of Si serving as an n-type impurity.

[0040] When the n-type GaN ground layer 103 is grown up to approximately 4 μm, TMA is introduced to form the n-type AlGa<sub>0.1</sub>N cladding layer 104. When the n-type AlGa<sub>0.1</sub>N cladding layer 104 is grown up to approximately 0.5 μm, supply of TMA is stopped to grow the n-type GaN guide layer 105 up to 0.1 μm. When growth of the n-type GaN guide layer 105 is completed, supply of TMG and Me-SiH<sub>3</sub> is stopped, and lowering of temperature is started to set the substrate temperature to 750 °C. When the substrate temperature reaches at 750 °C, carrier gas is changed from hydrogen to nitrogen. When the gas-flow state is stabilized, TMG, TMI, and Me-SiH<sub>3</sub> are introduced to grow the active layer 106. When the active layer is formed, supply of TMG, TMI, and Me-SiH<sub>3</sub> is stopped, and the carrier gas is changed from nitrogen to hydrogen. When the gas-flow state is stabilized, the substrate temperature is raised to 1050 °C again and TMG, TMA, and Et-CP<sub>2</sub>Mg (ethyl cyclopentadienyl magnesium) as the precursor of Mg serving as a p-type impurity are introduced to form the p-type AlGa<sub>0.1</sub>N layer 107 on the active layer 106 up to 0.01 μm. Then, supply of TMA is stopped to grow the p-type GaN guide layer 108 up to 0.1 μm and TMA is introduced again to grow the p-type AlGa<sub>0.1</sub>N cladding layer 109 up to 0.5 μm. Moreover, the p-type GaN contact layer 110 is grown on the layer 109 up to 0.1 μm. Thereafter, supply of TMG and Et-CP<sub>2</sub>Mg is stopped and temperature lowering is started. When the substrate temperature reaches 400 °C, supply of  $\text{NH}_3$  is also stopped. When the substrate temperature reaches room temperature, the sapphire substrate 101 is taken out of the reactor.

[0041] The obtained wafer is set into a heat treatment furnace to apply heat treatment for the p-type conversion.

[0042] A nickel (Ni) layer 115 with a thickness of 200 nm is formed on the surface changed to p-type as a p-side electrode by using the vacuum evaporation.

[0043] For the obtained wafer, a terrace for the p-side electrode, a recess for the n-side electrode, a current path structure for the n-side electrode are formed and a ridge-structure is formed on the terrace for the p-side electrode and a refractive-index waveguide structure for current confinement.

[0044] To form a current path for the n-side electrode, the Ni film is partly removed by wet etching, and the exposed area of the nitride semiconductor layer is partially etched by reactive ion etching (RIE) using  $\text{Cl}_2$  (chlorine) gas by utilizing the remaining Ni film 115 as a mask as shown in Fig 5. In this case, as shown in Fig. 6, etching is performed down to a depth where the n-type cladding layer 104 is slightly left to form a recessed portion 201.

[0045] Then, as shown in Fig. 7, the Ni film is removed by wet etching while leaving a width of 5  $\mu\text{m}$  to form the stripe 115 of the 5  $\mu\text{m}$ -wide Ni film.

[0046] In this case, as shown in Fig. 8, the longitudinal direction of the Ni stripe 115 is tilted up to an angle of  $2.4^\circ$  from the direction normal to the R-plane of sapphire. Also, the recessed portion 201 for forming an n-side electrode is formed with an angle of  $2.4^\circ$  in accordance with the tilt of the direction of the stripe 115. That is, a waveguide is formed to extend along the normal direction to the (1-100) plane which is the expected cleavage plane of nitride semiconductor.

[0047] Then, portions other than the portion immediately below the 5  $\mu\text{m}$ -wide stripe portion, i.e., the contact layer 110 and p-type AlGaIn cladding layer 9 are removed by reactive ion etching (RIE) using the Ni stripe 115 as a mask and leaving approximately 0.1  $\mu\text{m}$  of the cladding layer 9 to form the narrow ridge structure 118 as shown in Fig. 9. In this case, the remaining n-type cladding layer 104 is simultaneously removed and the n-type GaN ground layer 103 is exposed.

[0048] An  $\text{SiO}_2$  protective film is deposited on the wafer by sputtering. Thereafter, a 3  $\mu\text{m}$ -wide window on the p-type ridge and a window portion for an n-type electrode are formed in the  $\text{SiO}_2$  protective film by normal photolithography. Ti (titanium) is evaporated with a thickness of 50 nm and then, Al is evaporated with a thickness of 200 nm onto the portion where the n-type GaN layer 103 is exposed to form the n-side electrode 114. Then, 50 nm-thick Ni film is evaporated and Au is evaporated with a thickness of 200 nm onto the portion where a p-type GaN layer is exposed to form the p-side electrode 113. Thus, the individual device on the wafer has the structure shown in Fig. 10.

[0049] After completing the device structure forming step, the step of forming the decomposed-matter area of the nitride semiconductor is executed. As shown in Fig. 10, a short-wavelength laser beam having wave-

lengths of 248 nm or 266 nm (e.g. KrF excimer laser, or a frequency quadrupled YAG laser) is irradiated from the back of the sapphire substrate 101 to decompose a sapphire-GaN interface. When a decomposed-matter area is formed, it is preferable to uniform the light intensity of the laser-beam applied to the interface by setting a homogenizer in the optical path of the laser beam to be emitted. Moreover, emitted light is focused onto the sapphire-GaN interface and irradiate the irradiation area 151 shown by slant lines in Fig. 11. The irradiation area 151 is repeatedly formed at a fabrication pitch such as the device length of a nitride semiconductor laser. It is preferable to set the energy density of irradiation light to hundreds  $\text{mJ}/\text{cm}^2$  per pulse. If the energy density is much larger than hundreds  $\text{mJ}/\text{cm}^2$ , a device structure is broken. If the density is smaller than hundreds  $\text{mJ}/\text{cm}^2$ , the interface is not completely decomposed and thereby, sufficient effect cannot be obtained. Thus, the decomposed-matter area 150 of the nitride semiconductor is formed by the above-mentioned laser-beam irradiation.

[0050] After the decomposed-matter forming step, the scribing step is executed. The laser-beam applying position is moved to a position nearby the periphery of the wafer shown by "a" in Fig. 12 to adjust the focal position of the irradiation light from the sapphire-GaN interface to the surface of sapphire substrate 101. In this case, the width of the laser-beam applying area shown by "b" in Fig. 12 is set to several microns. Moreover, the energy density of the irradiation laser beam is set to a value larger by 20 times or more than the energy density for the decomposition of the sapphire-GaN interface. By performing laser-beam irradiation in accordance with the setting, it is possible to evaporate the sapphire in a narrow irradiation area by heat because sapphire slightly absorb the wavelength and to form a fine groove G on the surface of the sapphire substrate 101. The laser beam (or a substrate support stand) is moved in the direction shown by "c" in Fig. 12 to form the groove G at a predetermined depth and length. The marking operation by the laser (so-called scribing) is repeatedly performed in accordance with the pitch of the device length of the nitride semiconductor laser.

[0051] Thereafter, the sapphire substrate is cleaved in the direction shown by the alternate long and short dash line in Fig. 12 by using the groove G as a starting point. As a result, laser bars are obtained each having comparatively large cleavage planes for cavity mirror at the end of the crystal layers.

[0052] In the case of the present invention, groove formation by laser-beam irradiation is performed only at the margin of the laser wafer. Therefore, it is preferable to reduce the thickness of a substrate down to approximately 100  $\mu\text{m}$  in order to improve the quality of cleavage.

[0053] Moreover, it is preferable that a decomposition area by irradiation be as small as possible, because the present invention decomposes the interface between

sapphire and GaN by heat. This implies that a high accuracy is required for a scribing position for cleavage. In general, when scribing is performed with a conventional diamond point, positional alignment is separately performed for the laser-beam irradiation in the decomposed-matter forming step and the following scribing step. Therefore, a high-accuracy and complex alignment is necessary between the both steps. The scribing method of the present invention does not require any realignment of a wafer because irradiation and scribing are performed by the same apparatus.

[0054] Furthermore, when a high-hardness material such as sapphire is scribed by an ordinary scribing apparatus using a diamond point, the point is seriously abraded. However, the present invention has advantage in that the groove bottom having a micron-order curvature governs cleavability. Moreover, the stability of the groove bottom can be easily maintained.

[0055] A dielectric multilayer reflection coating is formed on the fracture plane (cleavage plane) of a fabricated laser bar by a sputtering system. By further separating the laser bar into discrete chips by means of secondary cleavage, the device shown in Fig. 4 is obtained. Hereafter, similarly to the case of a conventional laser device, the device is die-bonded to a sub-mount, set to a stem, and wire-bonded and moreover, through subsequent steps, and finally a laser device is completed.

[0056] As described above, when forming a laser structure on the A-face of a sapphire substrate and parting sapphire on its R-plane without irradiating a laser beam, fine striations shown in Fig. 3 are formed on the surface of GaN. This is because the wafer cracks along the R-plane of the sapphire since a major part of the wafer is made of sapphire. As described above, the R-plane of sapphire tilts by an angle of  $2.4^\circ$  from (1-100) plane of GaN and even after a crack reaches the sapphire-GaN interface, the crack propagates along the R-plane of ground sapphire up to a certain extent. However, because GaN tends to crack on its crystallographic cleavage plane (1-100), a plurality of (1-100) planes form in a stepwise fracture manner.

[0057] In the case of the present invention, the step of performing irradiation by a short-wave high-output laser is added. While sapphire serving as a substrate is almost transparent at 248 nm which is the wavelength of a laser beam used for the irradiation, GaN absorbs the irradiation beam with a small penetration depth because it has a absorption edge of 365 nm. Moreover, because of a large lattice mismatch (15%) present between sapphire substrate and GaN, extremely dense defects are present in the GaN nearby the interface and thereby, absorbed light is almost converted to heat. The temperature of an area of GaN nearby the sapphire substrate suddenly rises and thus, GaN is decomposed into gallium and nitrogen. Therefore, as for this area, direct bond between sapphire crystal and GaN are disconnected.

[0058] Described below in detail in the case in which

a sapphire substrate is cleaved along the R-plane according to the invention.

[0059] As shown in Fig. 13, when a crack propagating along the R-plane reaches the decomposed-matter area 150 formed by laser-beam irradiation (arrow "a"), GaN can crack along (1-100) plane which is the natural cleavage plane of GaN because ground sapphire and GaN are not directly bonded within the area 150. Therefore, the portion of the crack within the GaN layer propagates along (1-100) plane of GaN (arrow "b"). Moreover, the portion of the crack in the sapphire substrate directly propagates along the R-plane (arrow "c"). When the crack reaches the boundary of the decomposed-matter area 150, GaN starts to fracture in a stepwise manner again because GaN is tightly integrated with sapphire thereafter. Thus, the partable plane of sapphire and the cleavage plane of GaN branch from each other. By setting the length of the branched portion of cleavage plane, that is, the laser-irradiation length to a value equal to or larger than a ridge stripe width, a very smooth mirror facet is obtained.

[0060] As described above, the R-plane of a sapphire substrate tilts from an end face of the laser device by an angle of  $2.4^\circ$ . However, no problem occurs because both the ridges and electrodes are formed with an angle of  $2.4^\circ$  and a waveguide is vertical to (1-100) plane which is the cleavage plane of GaN.

[0061] In the case of the aforementioned embodiment, the device is formed on an A-face sapphire substrate. It is possible to form a device with a ridge-type laser structure on a C-face sapphire substrate, as is described in the second embodiment.

[0062] Fig. 14 shows a perspective view of the vicinity of the fracture plane of a laser device using C-face substrate 101c fabricated in the same steps as those of the first embodiment. When cracking the sapphire substrate 101c on (1-100) plane, GaN on the substrate 101c is cracked on (11-20) plane that is not the natural cleavage plane (1-100). However, because symmetry of GaN crystal, when a crack accurately advances in the direction along (11-20) plane, a very preferable fracture plane is obtained. However, unless a scribing line strictly extends along (1-100) plane, the fracture plane of sapphire becomes stepwise and the fracture plane of GaN on the sapphire also becomes stepwise.

[0063] As shown in Fig. 14, when a crack propagating almost along (1-100) plane reaches the decomposed-matter area of a nitride semiconductor (arrow "a"), GaN can crack along its (11-20) plane because ground sapphire and GaN are not directly bonded each other within the area 150 and the portion of the crack propagates along (11-20) plane of GaN (arrow "b"). Moreover, after passing through the decomposed-matter area 150, the GaN fracture plane becomes stepwise because GaN is bonded to sapphire (arrow "c"). Thus, because the decomposed-matter area 150 is formed by setting a laser-beam irradiation length to a value equal to or greater than a ridge stripe width, a very smooth facet plane is



formed at the end of a laser structure.

[0064] According to the present invention, an atomically flat plane is obtained because a reflector plane, which is one of the most important portions of a laser device, is constituted of the crystallographic cleavage plane of a nitride semiconductor itself.

[0065] Moreover, because it is possible to crack a sapphire substrate without greatly reducing its thickness, a trouble such as wafer fracture during the lapping process does not occur. Furthermore, because the thickness of the device is kept large, the device can be handled with relative ease, and superior for mass production.

#### Claims

1. A nitride semiconductor laser device having crystal layers (103, 104, 105, 106, 107, 108, 109, 110) layered each made of a group III nitride semiconductor ( $(\text{Al}_x\text{Ga}_{1-x})_{1-y}\text{In}_y\text{N}$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ )) comprising:
  - a cleavable or parting substrate (101);
  - a crystal layer (103) made of the group III nitride semiconductor formed directly on the substrate;
  - a mirror facet for optical resonance consisting of a cleavage plane of said crystal layers made of the group III nitride semiconductor; and
  - a decomposed-matter area (150) of the nitride semiconductor interposed at the interface between said substrate (101) and said crystal layer (103), in which decomposed-matter area the crystal bond between said substrate, and said crystal layer is broken, said decomposed-matter area being disposed at an intersecting portion with the cleavage plane.
2. A nitride semiconductor laser device according to claim 1, wherein the decomposed-matter area of the nitride semiconductor is formed by a light beam applied to the interface from the substrate side.
3. A nitride semiconductor laser device according to claim 1 further comprising a waveguide (118) extending along a direction normal to the cleavage plane of the nitride semiconductor.
4. A nitride semiconductor laser device according to claim 3, wherein the waveguide has a ridge shape.
5. A nitride semiconductor laser device according to claim 1, wherein the substrate is made of sapphire.
6. A method for fabricating a nitride semiconductor laser device having crystal layers (103, 104, 105, 106, 107, 108, 109, 110) each made of a group III nitride semiconductor ( $(\text{Al}_x\text{Ga}_{1-x})_{1-y}\text{In}_y\text{N}$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ))

and layered on a cleavable or parting substrate (101) in order, the method comprising the steps of:

- forming a plurality of crystal layers each made of a group III nitride semiconductor ( $(\text{Al}_x\text{Ga}_{1-x})_{1-y}\text{In}_y\text{N}$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ )) on a cleavable or parting substrate;
  - applying a light beam from the substrate side toward the interface between the substrate and the first of said plurality of crystal layers formed on said substrate thereby forming a decomposed-matter area (150) of a nitride semiconductor, in which the crystal bond between said substrate and said first crystal layer is broken;
  - and
  - cleaving the substrate along a straight line intersecting with the decomposed-matter area, thereby forming a cleavage plane of said plurality of crystal layers.
7. A method for fabricating a nitride semiconductor laser device according to claim 6, wherein a wavelength of the light beam is selected from wavelengths passing through the substrate and absorbed by the crystal layer in a vicinity of the interface.
  8. A method for fabricating a nitride semiconductor laser device according to claim 6 further comprising a step of forming a waveguide (118) extending along the direction normal to the cleavage plane of the nitride semiconductor.
  9. A method for fabricating a nitride semiconductor laser device according to claim 6, wherein the crystal layers of the nitride semiconductor are formed by metal-organic chemical vapor deposition.
  10. A method for fabricating a nitride semiconductor laser device according to claim 8 further comprising a step of applying a light beam focused on an outer surface of the substrate to form a groove serving as a starting point of the aforementioned straight line in the step of forming the mirror facet for optical resonance.

#### Patentansprüche

1. Nitrid-Halbleiterlaservorrichtung mit geschichteten Kristallschichten (103, 104, 105, 106, 107, 108, 109, 110) jeweils aus einem Gruppe III - Nitrid-Halbleiter ( $(\text{Al}_x\text{Ga}_{1-x})_{1-y}\text{In}_y\text{N}$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ )), mit einem spaltbaren oder sich trennenden Substrat (101); einer Kristallschicht (103) aus dem Gruppe III - Nitrid-Halbleiter, die direkt auf dem Substrat gebildet ist;



- einer Spiegelfläche für optische Resonanz, bestehend aus einer Spaltebene der Kristallschichten aus dem Gruppe III - Nitrid-Halbleiter; und einem Bereich zerlegter Materie (150) des Nitrid-Halbleiters, der sich an der Grenzfläche zwischen dem Substrat (101) und der Kristallschicht (103) befindet, in welchem Bereich zerlegter Materie die Kristallbindung zwischen dem Substrat und der Kristallschicht gebrochen ist, wobei der Bereich zerlegter Materie an einem Kreuzungsabschnitt mit der Spaltebene angeordnet ist.
2. Nitrid-Halbleiterlaservorrichtung nach Anspruch 1, bei welcher der Bereich zerlegter Materie des Nitrid-Halbleiters durch einen von der Substratseite auf die Grenzfläche gerichteten Lichtstrahl gebildet wird.
  3. Nitrid-Halbleiterlaservorrichtung nach Anspruch 1, ferner mit einem Wellenleiter (118), der entlang einer Richtung senkrecht zu der Spaltebene des Nitrid-Halbleiters verläuft.
  4. Nitrid-Halbleiterlaservorrichtung nach Anspruch 3, bei welchem der Wellenleiter eine Dachform besitzt.
  5. Nitrid-Halbleiterlaservorrichtung nach Anspruch 1, bei welchem das Substrat aus Saphir ist.
  6. Verfahren zur Herstellung einer Nitrid-Halbleiterlaservorrichtung mit Kristallschichten (103, 104, 105, 106, 107, 108, 109, 110), die jeweils aus einem Gruppe III - Nitrid-Halbleiter  $(Al_xGa_{1-x})_{1-y}In_yN$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) gemacht und nacheinander auf einem spaltbaren oder sich teilenden Substrat (101) geschichtet sind, wobei das Verfahren die Schritte aufweist:  
Bilden mehrerer Kristallschichten jeweils aus einem Gruppe III - Nitrid-Halbleiter  $(Al_xGa_{1-x})_{1-y}In_yN$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) auf einem spaltbaren oder sich trennenden Substrat;  
Richten eines Lichtstrahls von der Substratseite zu der Grenzfläche zwischen dem Substrat und der ersten der mehreren auf dem Substrat gebildeten Kristallschichten, wodurch ein Bereich zerlegter Materie (150) eines Nitrid-Halbleiters gebildet wird, in dem die Kristallbindung zwischen dem Substrat und der ersten Kristallschicht gebrochen ist; und  
Spalten des Substrats entlang einer geraden Linie, die den Bereich zerlegter Materie kreuzt, wodurch eine Spaltebene der mehreren Kristallschichten gebildet wird.
  7. Verfahren zur Herstellung einer Nitrid-Halbleiterlaservorrichtung nach Anspruch 6, bei welchem eine Wellenlänge des Lichtstrahls aus Wellenlängen ausgewählt ist, die durch das Substrat laufen und

durch die Kristallschicht in einer Nähe der Grenzfläche absorbiert werden.

8. Verfahren zur Herstellung einer Nitrid-Halbleiterlaservorrichtung nach Anspruch 6, ferner mit einem Schritt des Bildens eines Wellenleiters (118), der entlang der Richtung senkrecht zu der Spaltebene des Nitrid-Halbleiters verläuft.
9. Verfahren zur Herstellung einer Nitrid-Halbleiterlaservorrichtung nach Anspruch 6, bei welchem die Kristallschichten des Nitrid-Halbleiters durch eine metallorganische Abscheidung aus der Gasphase gebildet werden.
10. Verfahren zur Herstellung einer Nitrid-Halbleiterlaservorrichtung nach Anspruch 6, ferner mit einem Schritt des Richtens eines auf eine Außenfläche des Substrats fokussierten Laserstrahls, um einen als Startpunkt der oben genannten geraden Linie dienenden Einschnitt zu bilden, in dem Schritt des Bildens der Spiegelfläche für optische Resonanz.

## Revendications

1. Dispositif de laser semiconducteur à base de nitrure ayant des couches cristallines (103, 104, 105, 106, 107, 108, 109, 110) déposées chacune faite d'un semiconducteur à base de nitrure du groupe III  $(Al_xGa_{1-x})_{1-y}In_yN$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) comprenant :  
un substrat clivable ou de division (101) ;  
une couche cristalline (103) faite du semiconducteur à base de nitrure du groupe III formé directement sur le substrat ;  
une facette de miroir pour une résonance optique se composant d'un plan de clivage desdites couches cristallines faites du semiconducteur à base de nitrure du groupe III ; et  
une zone de matière altérée (150) du semiconducteur à base de nitrure interposé à l'interface entre ledit substrat (101) et ladite couche cristalline (103), dans laquelle la zone de matière altérée, la liaison cristalline entre ledit substrat et ladite couche cristalline est rompue, ladite zone de matière altérée étant disposée sur une partie d'intersection avec le plan de clivage.
2. Dispositif de laser semiconducteur à base de nitrure selon la revendication 1, dans lequel la zone de matière altérée du semiconducteur à base de nitrure est formée par un faisceau de lumière appliqué à l'interface à partir du côté du substrat.
3. Dispositif de laser semiconducteur à base de nitrure selon la revendication 1 comprenant en outre un guide onde (118) s'étendant le long d'une direction

normale au plan de clivage du semiconducteur à base de nitrure.

4. Dispositif de laser semiconducteur à base de nitrure selon la revendication 3, dans lequel le guide onde a une forme de moulure. 5
5. Dispositif de laser semiconducteur à base de nitrure selon la revendication 1, dans lequel le substrat est fait de saphir. 10
6. Procédé de fabrication d'un dispositif de laser semiconducteur à base de nitrure ayant des couches cristallines (103, 104, 105, 106, 107, 108, 109, 110) faites chacune d'un semiconducteur à base de nitrure du groupe III  $(Al_xGa_{1-x})_{1-y}In_yN$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) et déposé sur un substrat clivable ou de division (101) dans l'ordre, le procédé comprenant les étapes de : 15
  - formation d'une pluralité de couches cristallines faites chacune d'un semiconducteur à base de nitrure du groupe III  $(Al_xGa_{1-x})_{1-y}In_yN$  ( $0 \leq x \leq 1$ ,  $0 \leq y \leq 1$ ) sur un substrat clivable ou de division ; 20
  - application d'un faisceau de lumière à partir du côté du substrat vers l'interface entre le substrat et la première de ladite pluralité des couches cristallines formées sur ledit substrat formant ainsi une zone de matière altérée (150) d'un semiconducteur à base de nitrure dans lequel la liaison cristalline entre ledit substrat et ladite première couche cristalline est rompue ; 25
  - et
  - clivage du substrat le long d'une ligne droite coupant la zone de matière altérée, formant ainsi un plan de clivage de ladite pluralité des couches cristallines. 30
7. Procédé de fabrication d'un dispositif de laser semiconducteur à base de nitrure selon la revendication 6, dans lequel une longueur d'onde du faisceau de lumière est sélectionnée à partir des longueurs d'onde passant à travers le substrat et absorbé par la couche cristalline au voisinage de l'interface. 35
8. Procédé de fabrication d'un dispositif de laser semiconducteur à base de nitrure selon la revendication 6 comprenant en outre une étape de formation d'un guide onde (118) s'étendant le long de la direction normale d'un plan de clivage du semiconducteur à base de nitrure. 40
9. Procédé de fabrication d'un dispositif de laser semiconducteur à base de nitrure selon la revendication 6, dans lequel les couches cristallines du semiconducteur à base de nitrure sont formées par un dépôt chimique organo-métallique en phase vapeur. 45

10. Procédé de fabrication d'un dispositif laser semiconducteur à base de nitrure selon la revendication 6 comprenant en outre une étape d'application d'un faisceau de lumière focalisé sur une surface externe du substrat pour former une gorge servant comme un point de départ de la ligne droite susmentionnée dans l'étape de formation de la facette de miroir pour la résonance optique. 50

FIG. 1

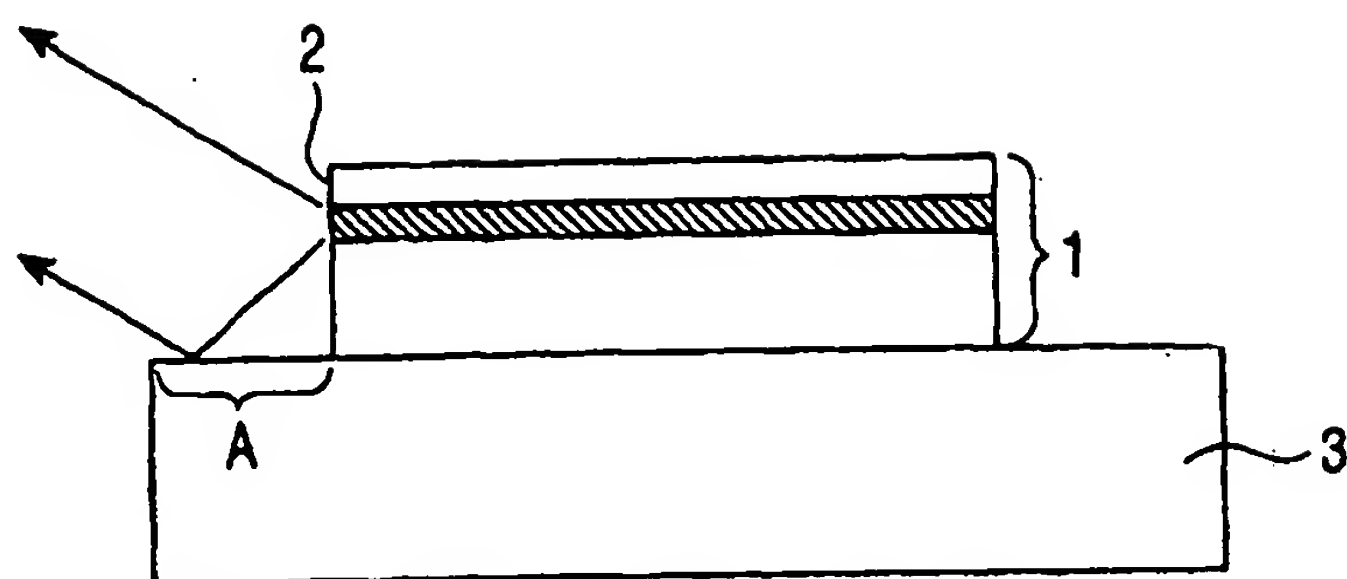


FIG. 2

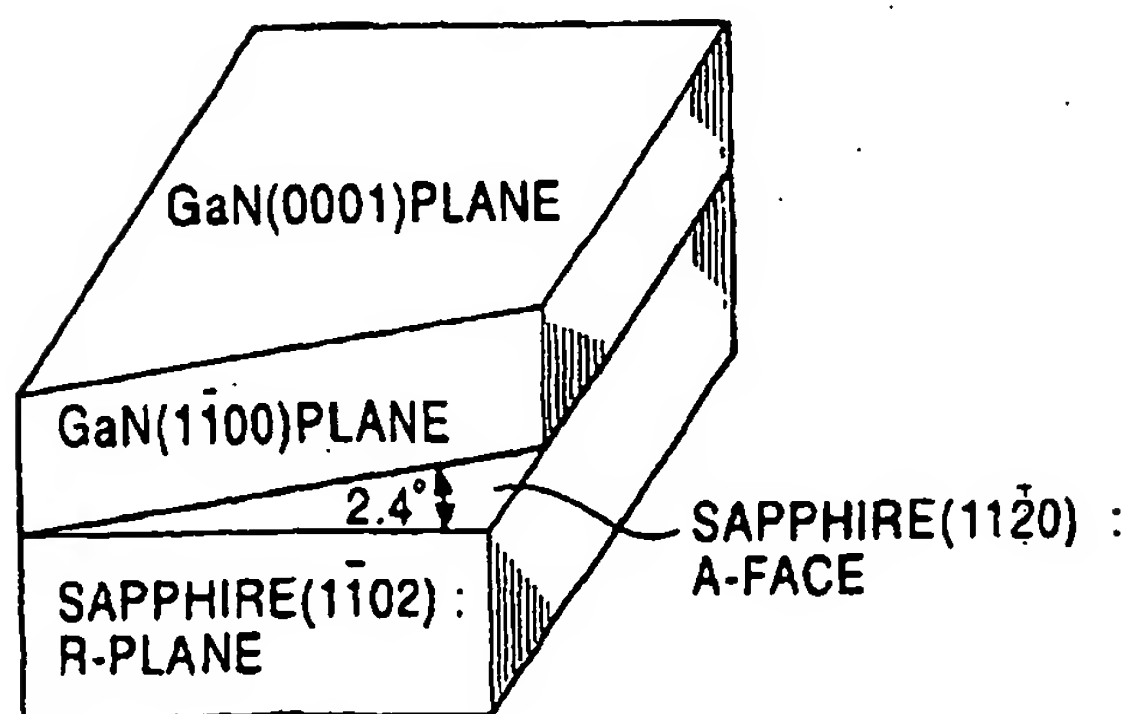


FIG. 3

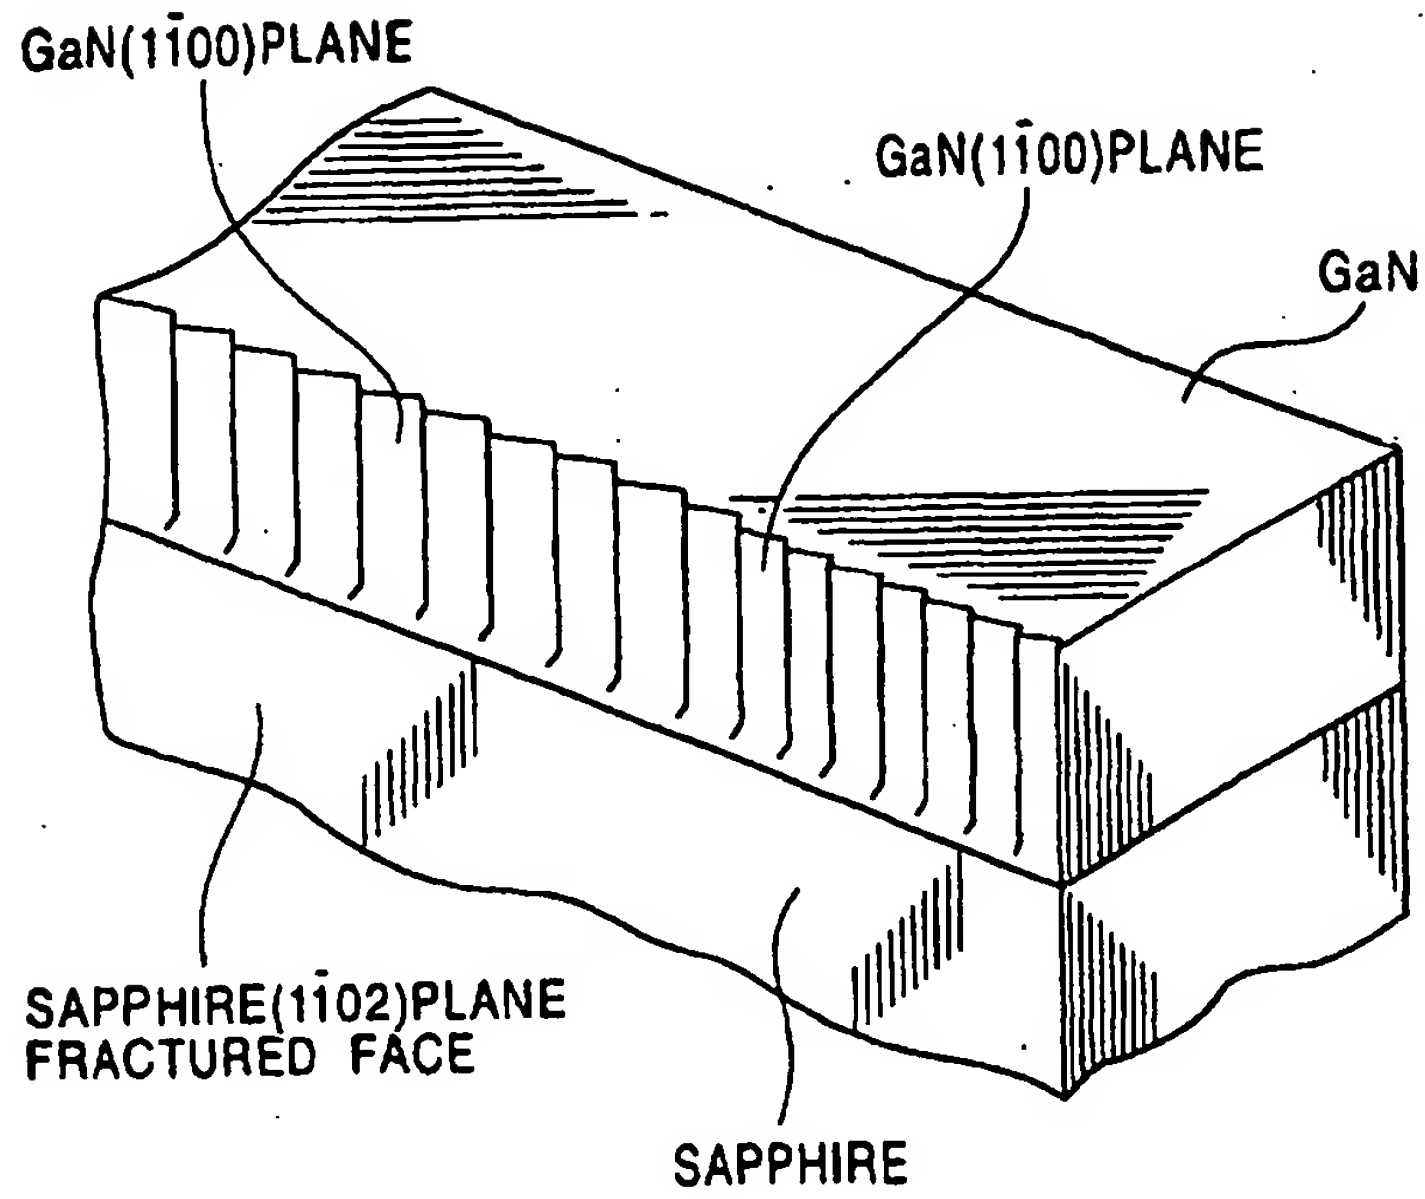


FIG. 4

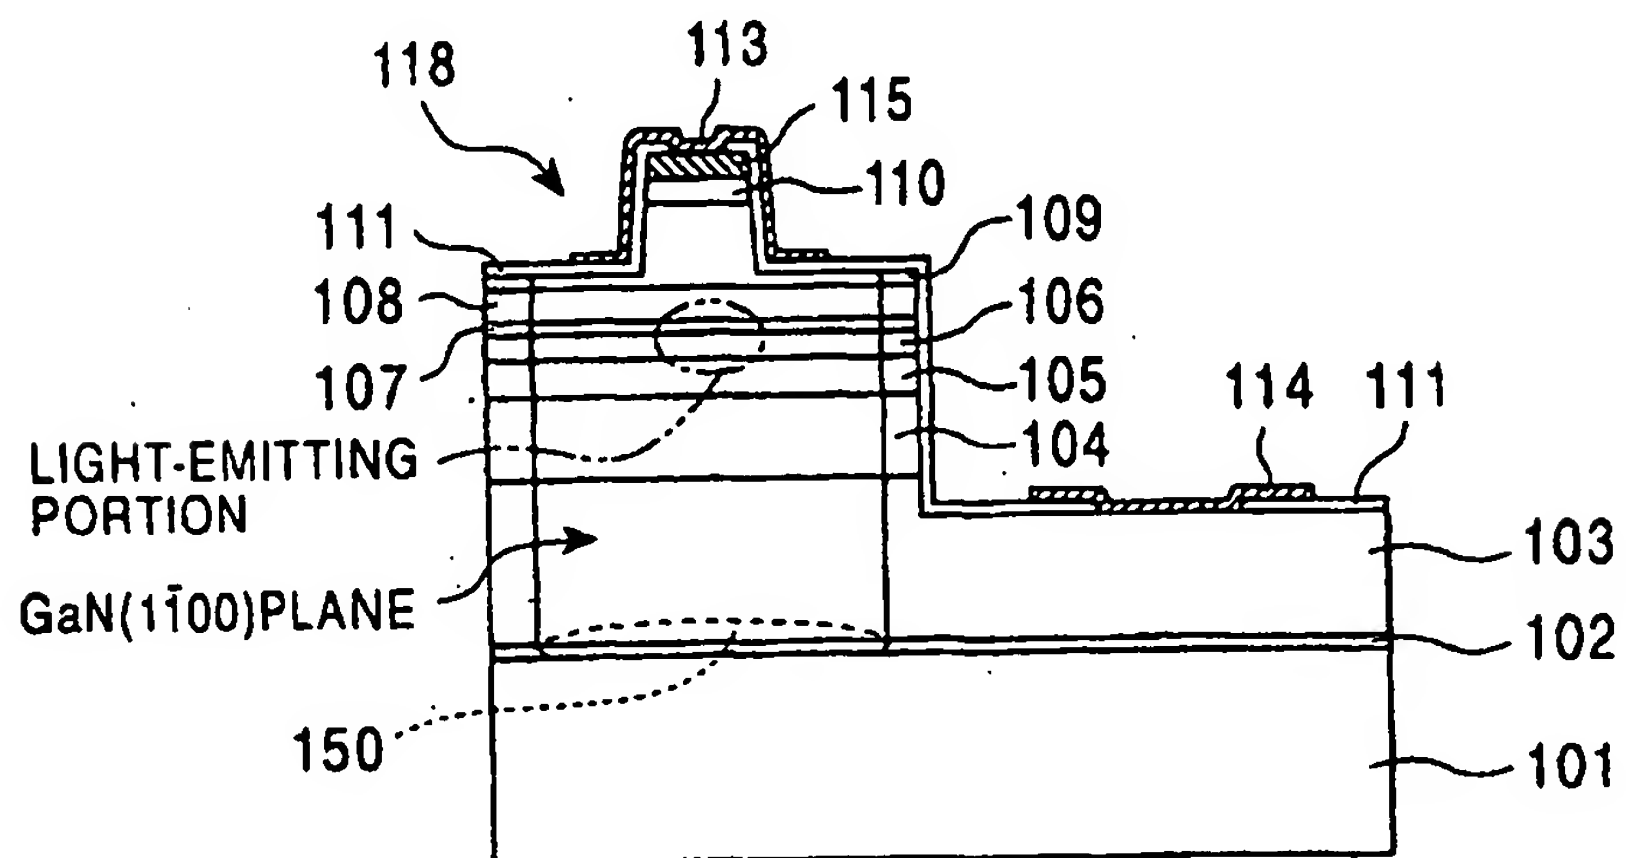




FIG. 5

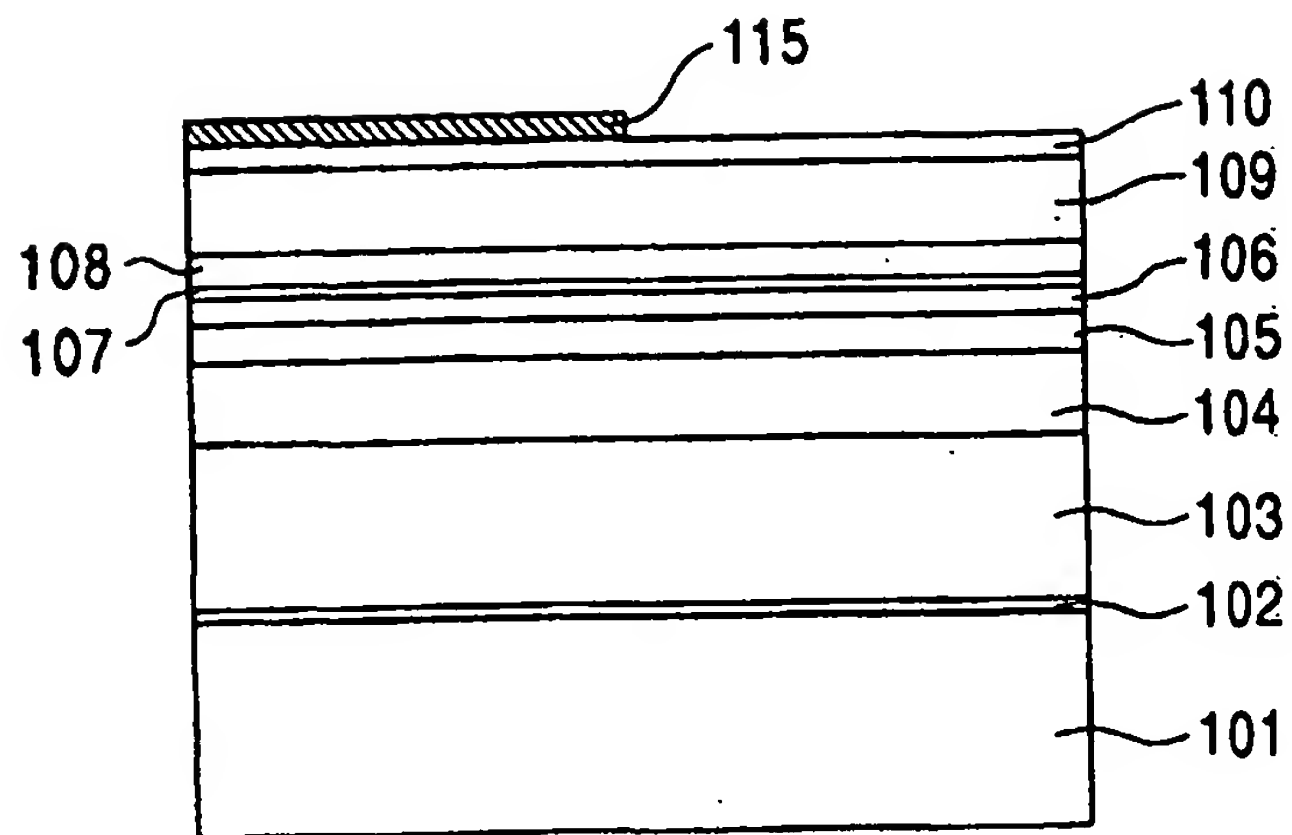


FIG. 6

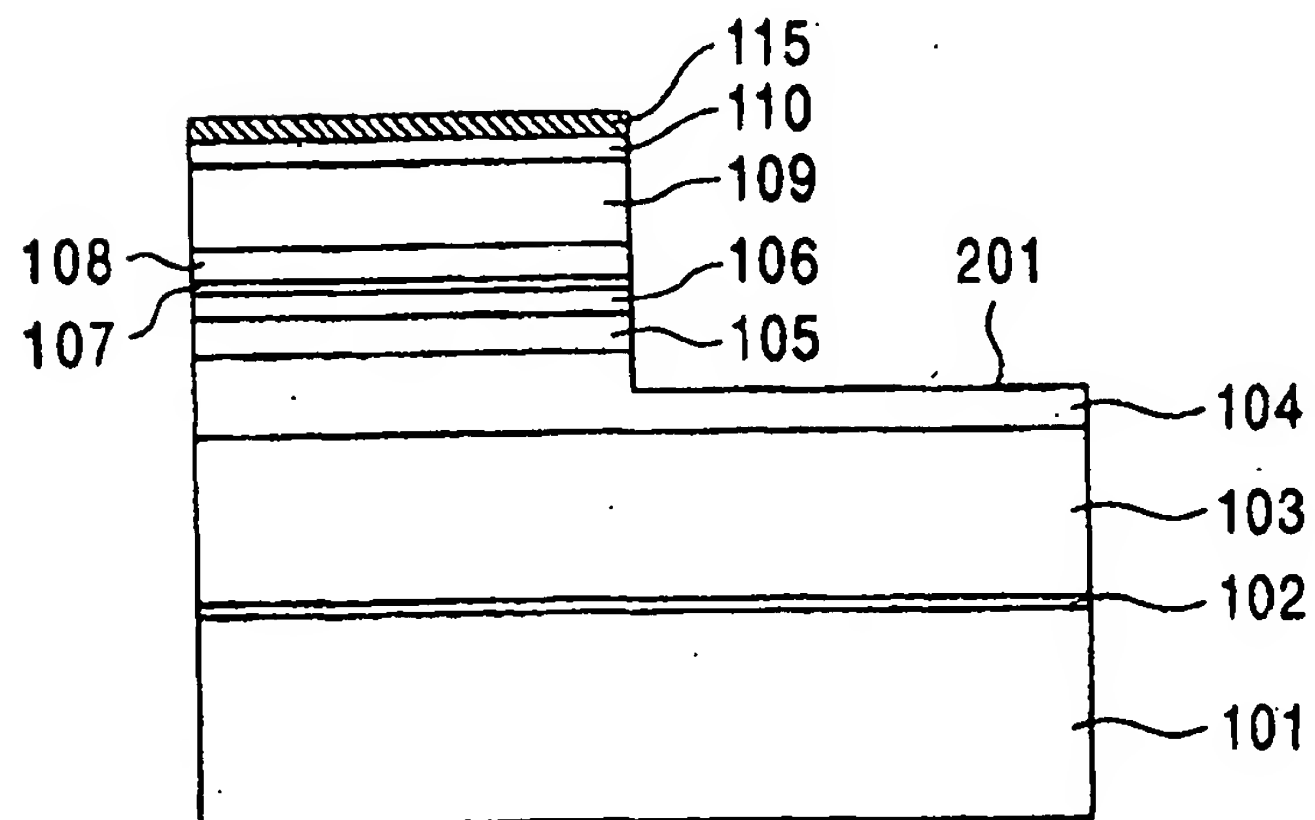


FIG. 7

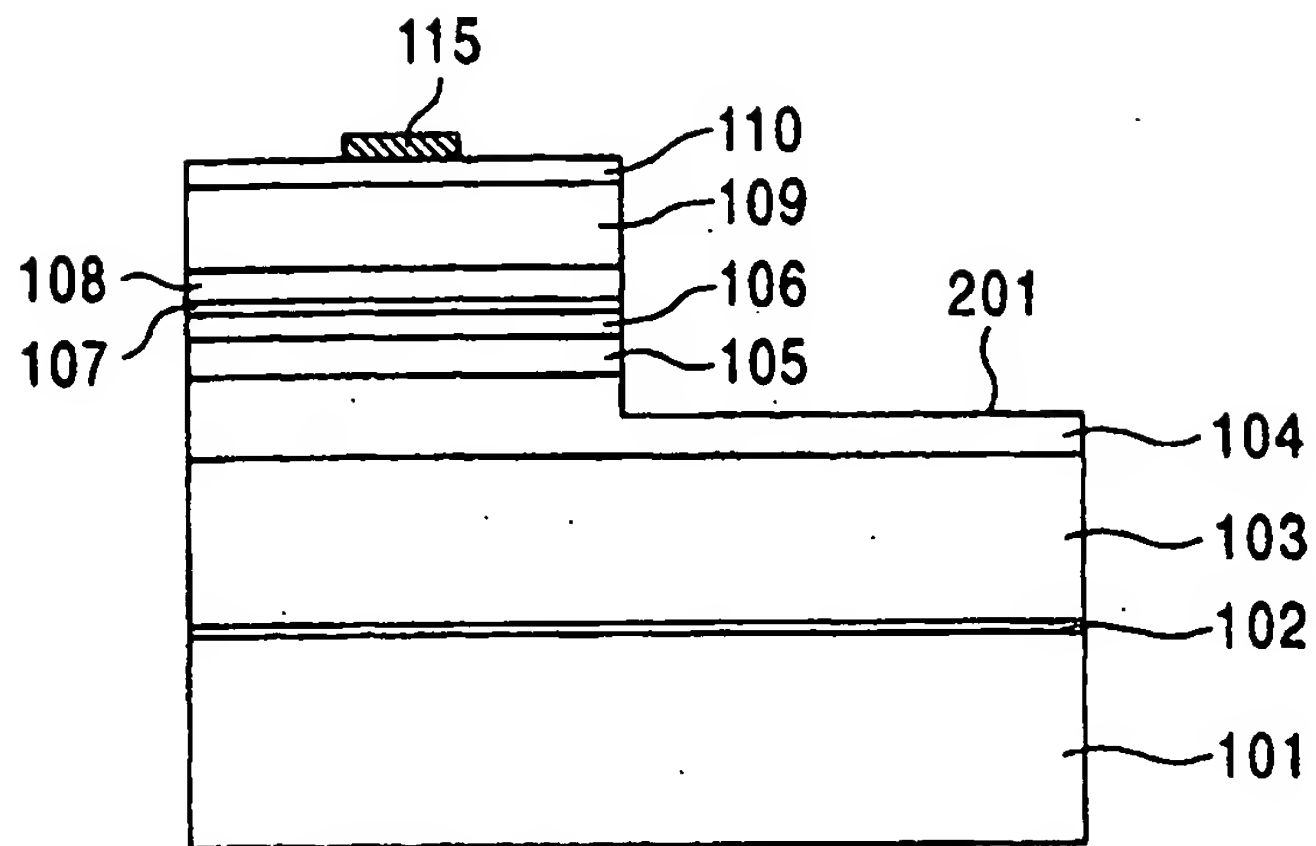


FIG. 8

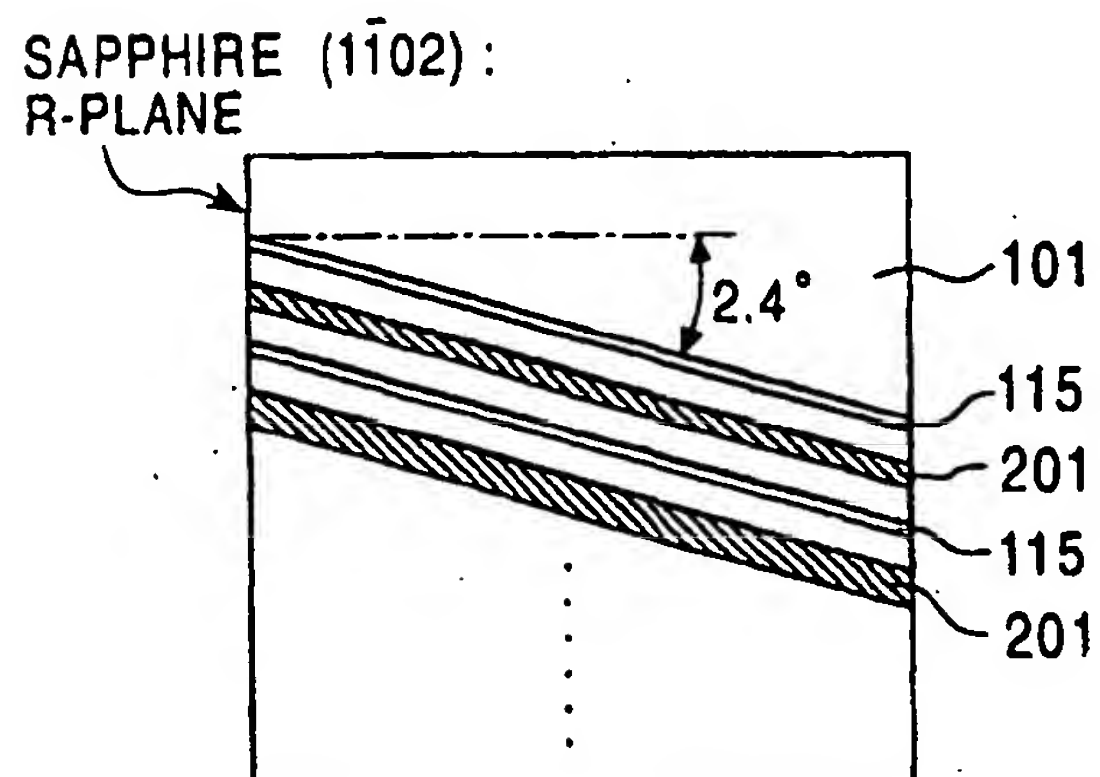


FIG. 9

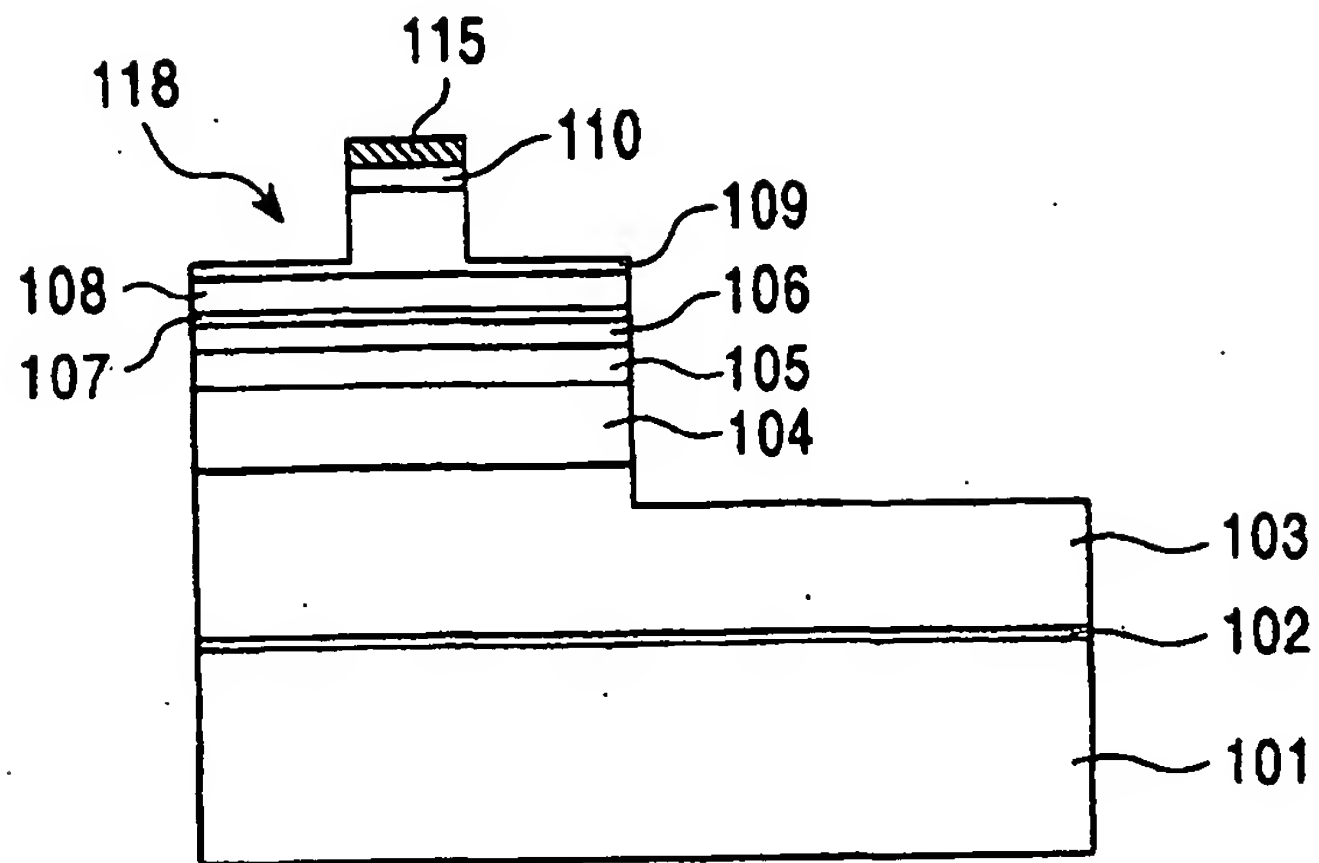


FIG. 10

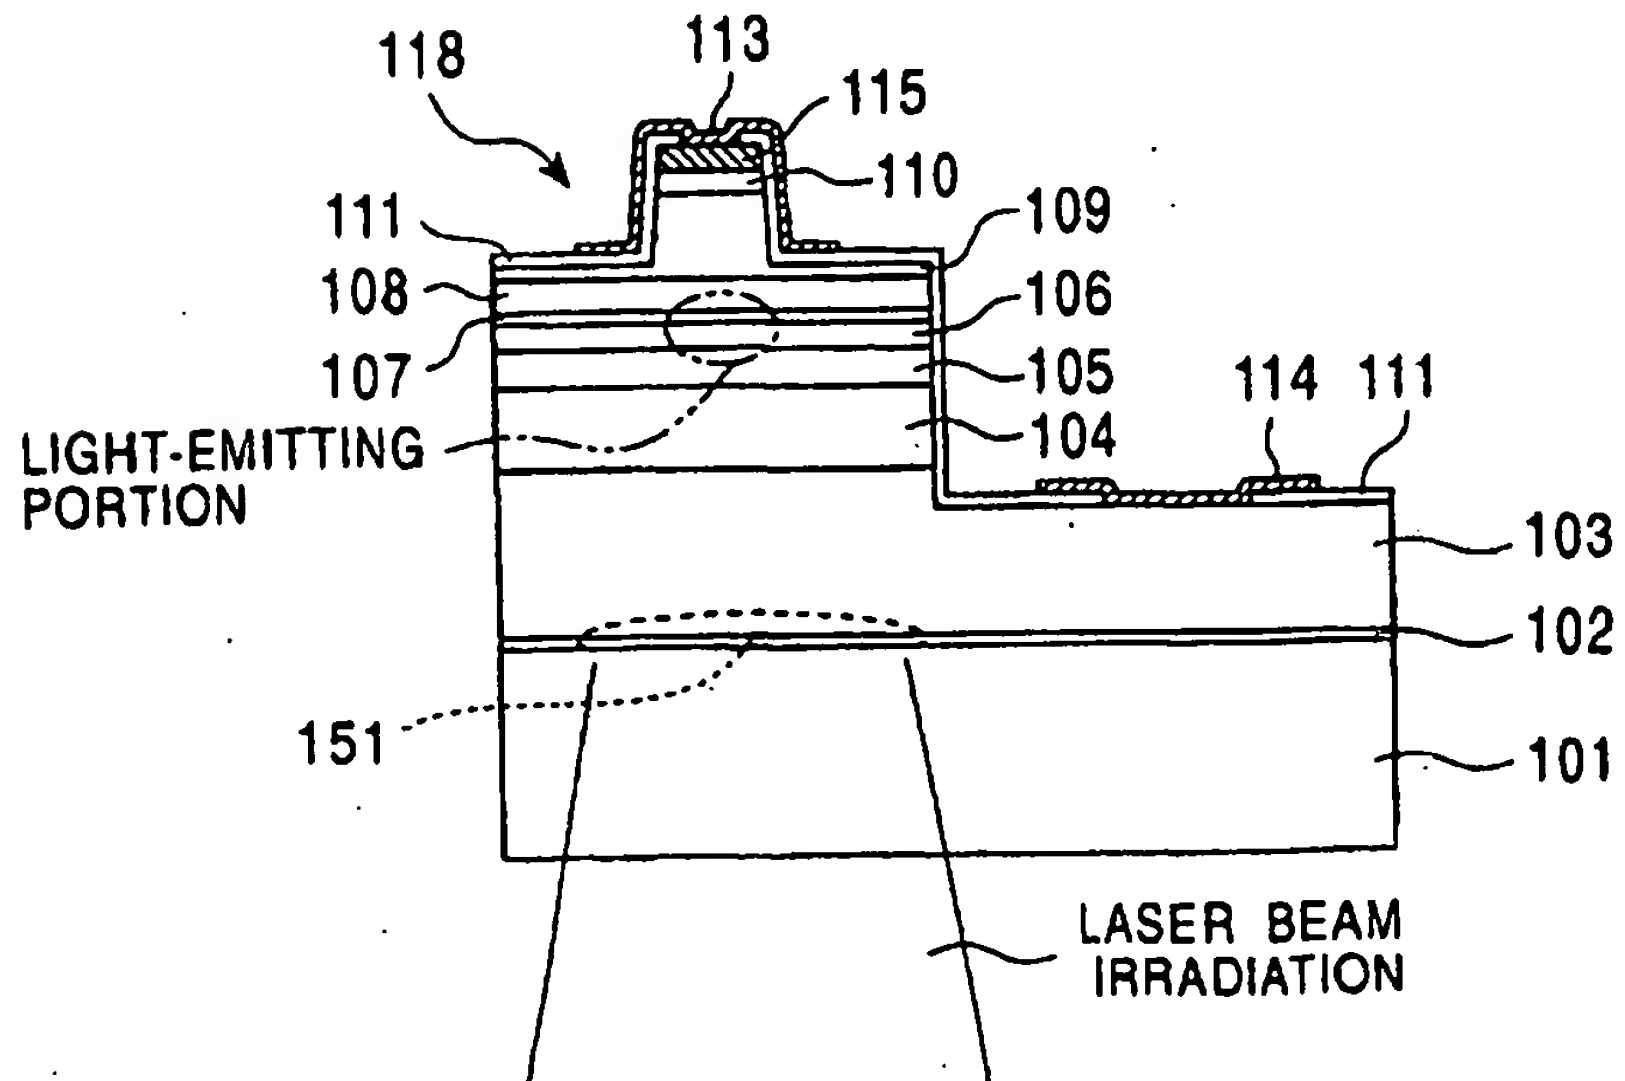


FIG. 11

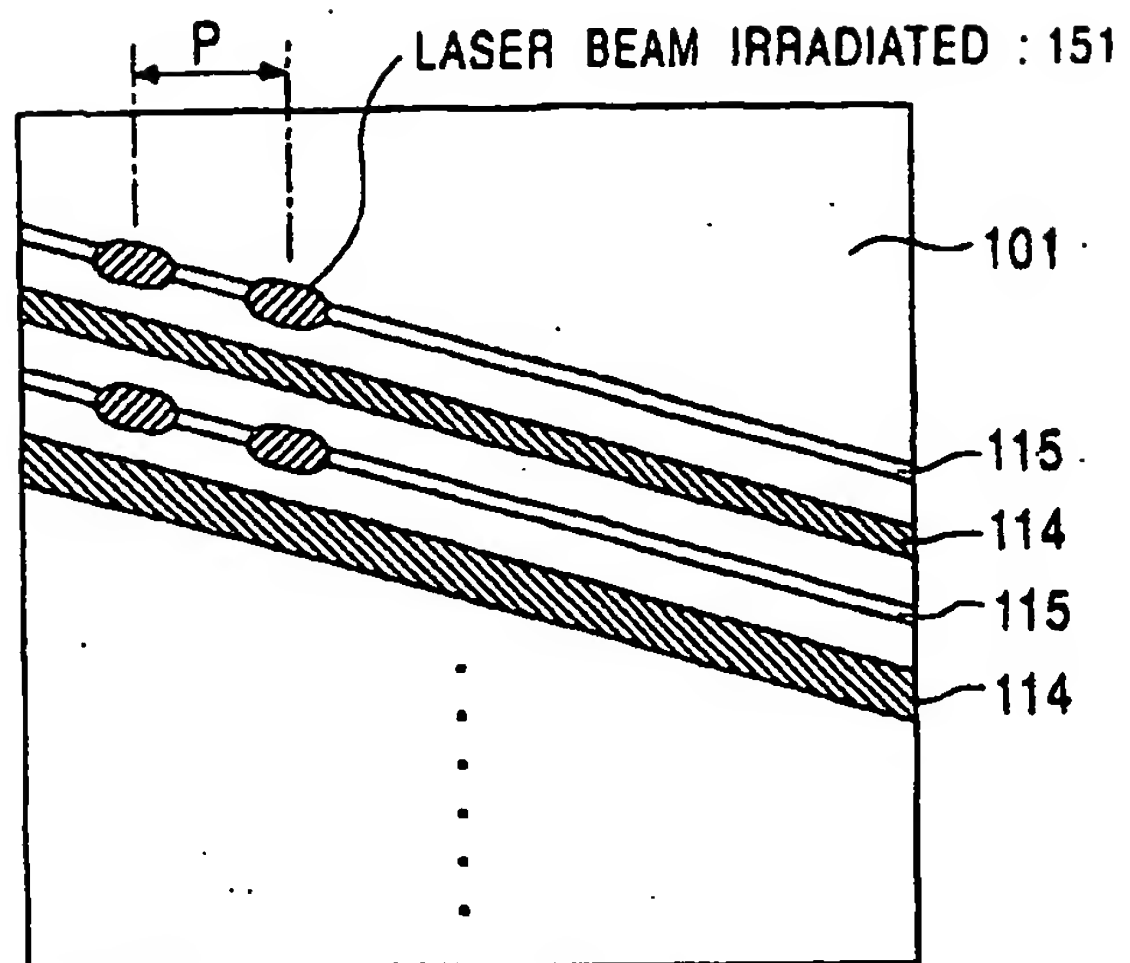


FIG. 12

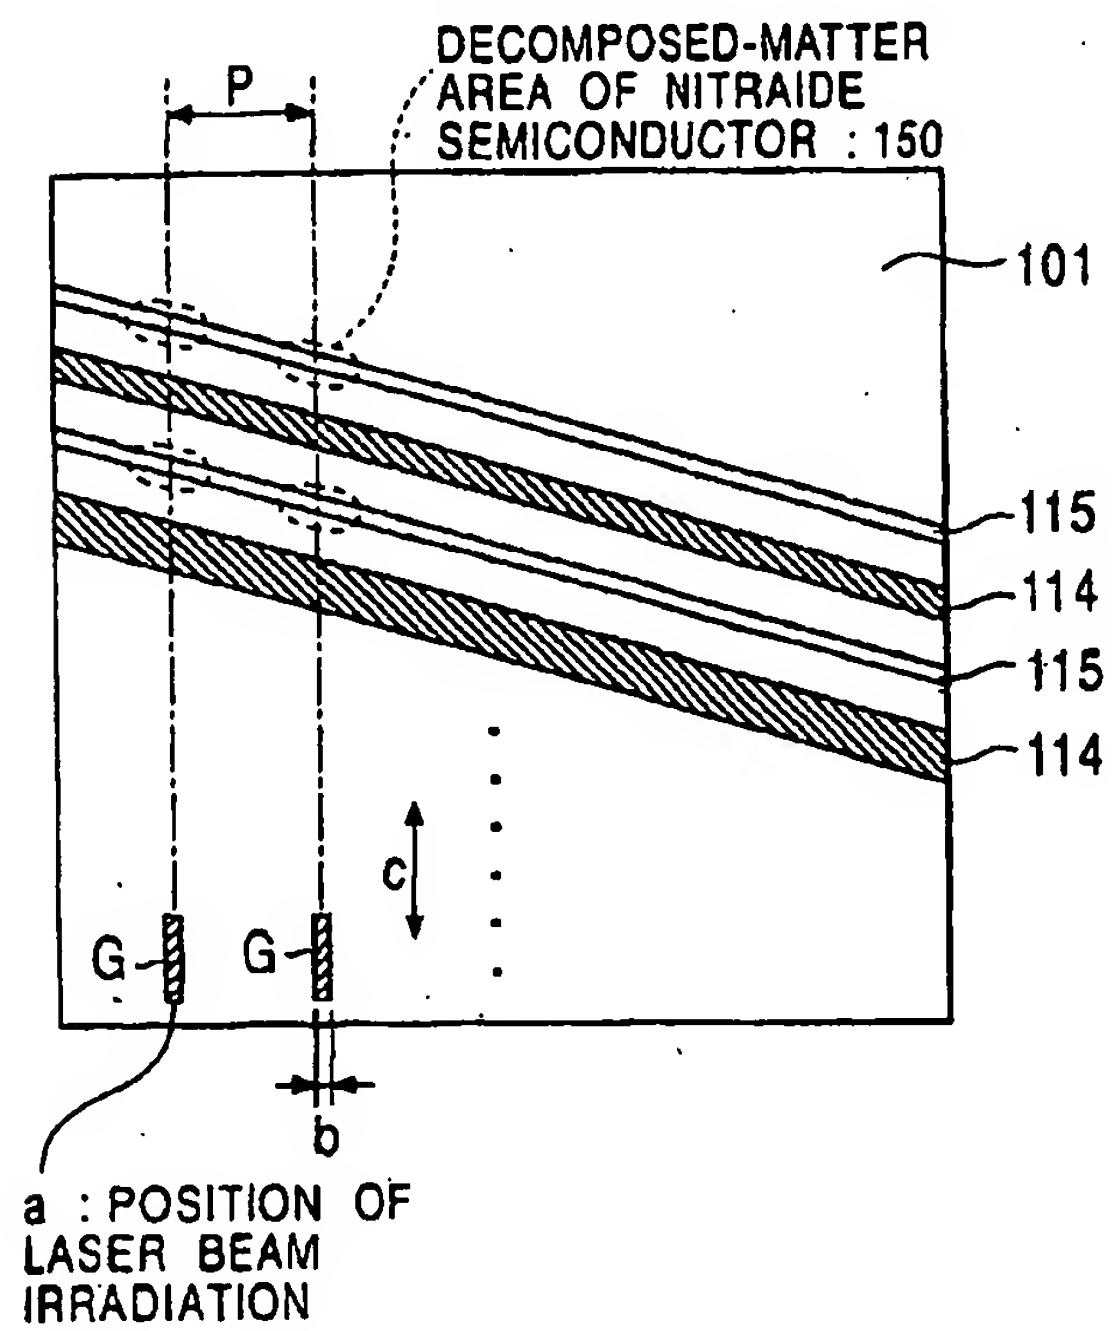




FIG. 13

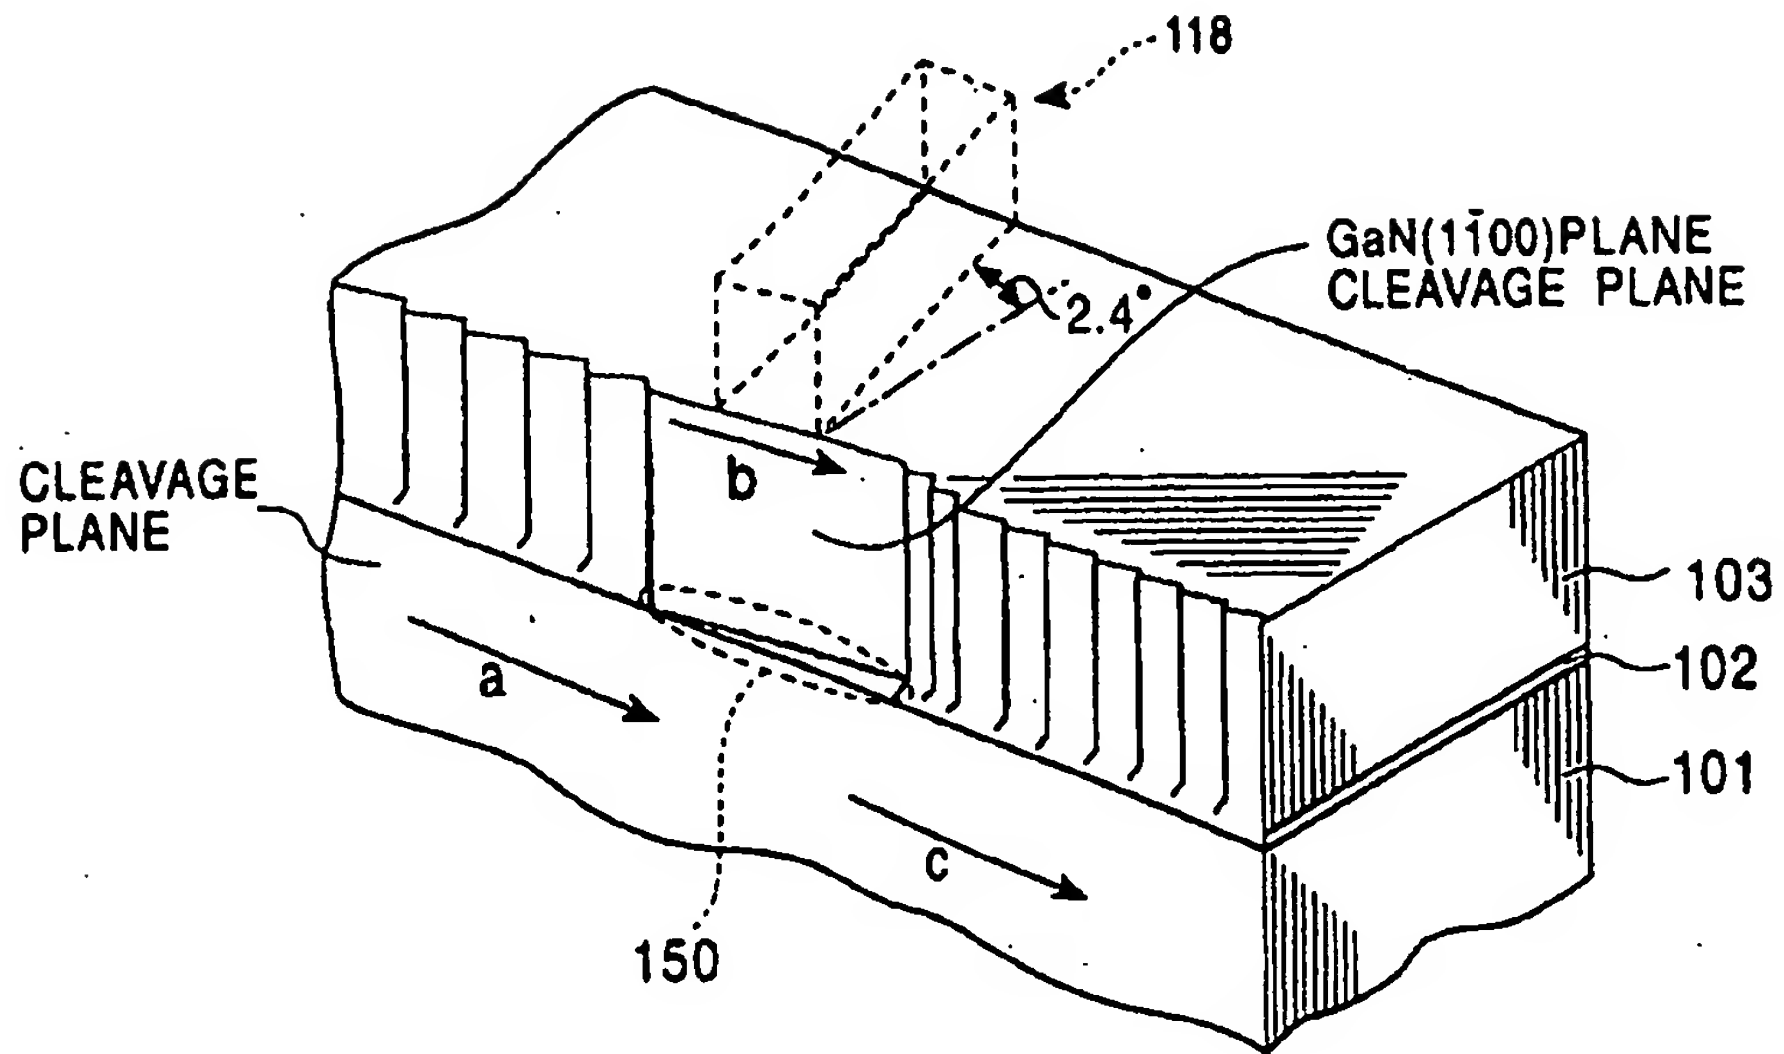


FIG. 14

